

Short Description



- Elastomer made from galvanised construction steel & natural rubber
- Suitable for shock load
- Easy installation
- Can be used with load cell model: BM8G
- Load cell is sold separately

Available Models

Model	Capacity	Full Article Description	Part Number
Elastomer BM8G	0.5t – 2t	Elastomer BM8G- 0.5 - 2t	20802430
	5t	Elastomer BM8G- 5t	20802420
	10t	Elastomer BM8G- 10t	20802410



Technical Specifications

Capacity with Load Cell	0.5t – 2t	5t	10t
Maximum deflection at nominal load	0,8 – 1,0mm	0,4mm	0,2mm
Allowable lift-off force (continuous)	1,5kN	2,7kN	3,4kN
Allowable lift-off force (short term)	2,3kN	4,0kN	4,7kN
Permissible horizontal force	2,7kN	5,5kN	8,0kN
Permissible horizontal deformation	5,2mm	5,5mm	4,7mm



Specifications and dimensions are subject to change without notice and do not constitute any liability whatsoever.

Dimensions in mm



0.5 – 2t

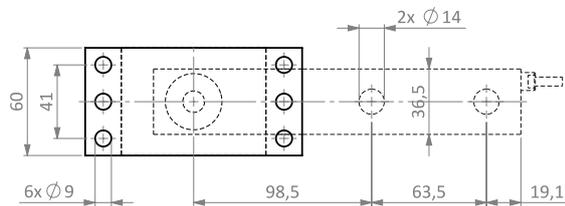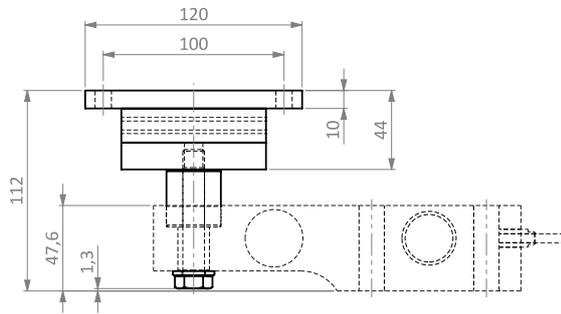


5t

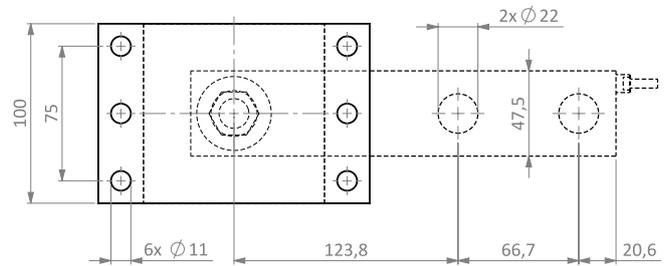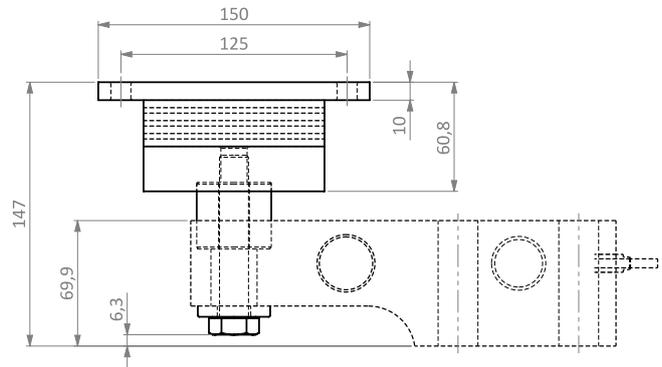


10t

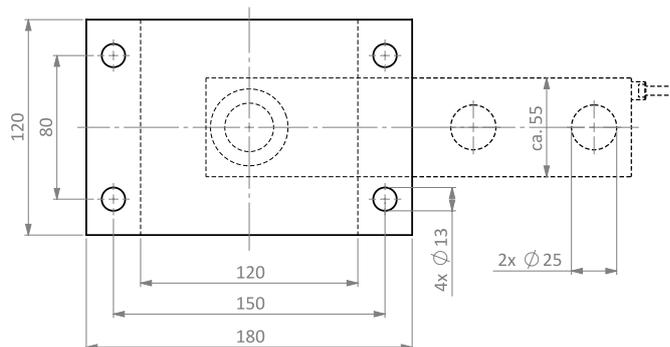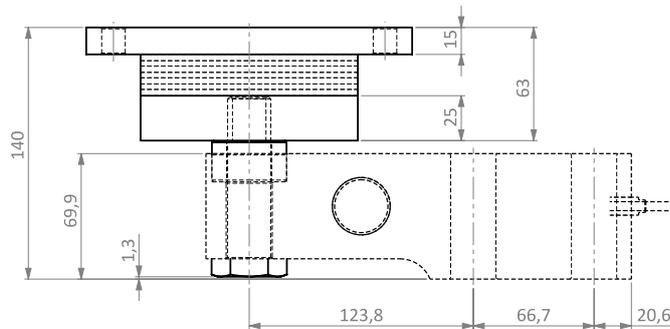

Isometric View 0.5 – 2t & 5t

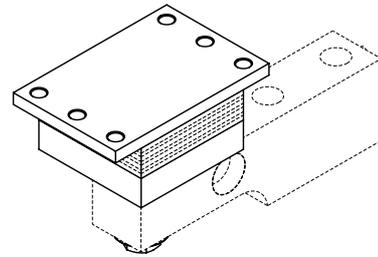

Isometric View 10t

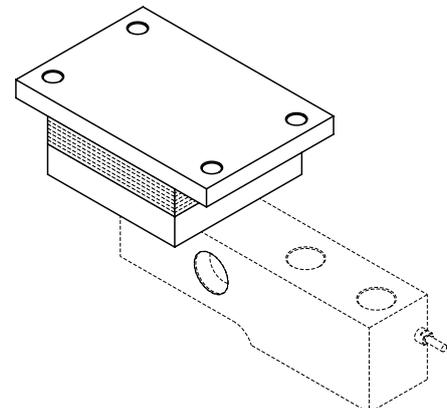

Specifications and dimensions are subject to change without notice and do not constitute any liability whatsoever.