



Short Description



- Nickel plated alloy steel IP67 shear beam load cell
- Low profile
- Suitable for hopper, floor and other electronic scales
- High accuracy



Test certificate no. TC8382 Revision 0
C of C no R60/2000-NL1-13.21 Rev. 1

Available Models

Capacity	Accuracy	Full Article Description
200kg	C3	H8Q-C3-200kg-3B
500kg	C3	H8Q-C3-500kg-3B
1000kg	C3	H8Q-C3-1000kg-3B
2000kg	C3 Excluded from OIML	H8Q-C3-2000kg-3B

Technical Specifications H8Q


Accuracy Class		OIML R60 C3	C3	
Output Sensitivity (= FS)	mV/V	2.0 ± 0.002		
Maximum Capacity (E _{max})	kg	200, 500, 1000	2000	
Max. Number of Load Cell Intervals	n _{LC}	3000		
Ratio of min. LC Verification Interval	$Y = E_{max} / v_{min}$	15000	10000	
Combined Error	%FS	≤± 0.0230		
Creep Error (30 minutes)	%FS	≤± 0.016		
Temperature Effect on Zero (ZTC)	%FS/10°C	≤± 0.015		
Temperature Effect on Sensitivity (STC)	%FS/10°C	≤± 0.011		
Zero Balance	%FS	≤± 1.0		
Safe Overload	%FS	150		
Ultimate Overload	%FS	300		
Maximum Deflection	mm	0.57		
Excitation, Recommended Voltage	V	5 ~ 12		
Excitation, Maximum Voltage	V	18		
Input Resistance	Ω	1000 ± 10		
Output Resistance	Ω	1000 ± 10		
Insulation Resistance (50V)	MΩ	≥5000		
Compensated Temperature	°C	-10 ~ + 40		
Operating Temperature	°C	-35 ~ + 70		
Storage Temperature	°C	-40 ~ + 70		
Load Cell Weight	kg	200kg – 500kg: ~0.5	1000kg: 0.6	2000kg: 1.0
Element Material		Nickel Plated Alloy Steel		
Ingress Protection (acc. to EN 60529)		IP67		
Recommended Torque on Fixation Bolts	Nm	M12: 75		

Wiring

Features:

Cable type: Shielded, 4 conductor cable , conductor AWG 22
 Cable diameter: Ø 5.0mm
 Cable length: 3.0m ± 0.1m
 Cable jacket: Polyurethane
 Shield not connected to element


4-Wire Connection Diagram

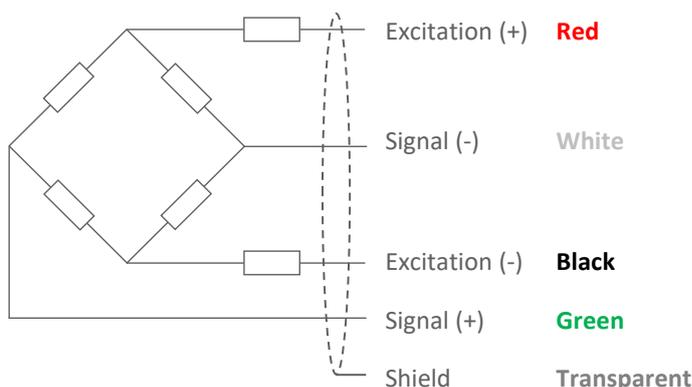


Specifications and dimensions are subject to change without notice and do not constitute any liability whatsoever.

Dimensions in mm

Front View

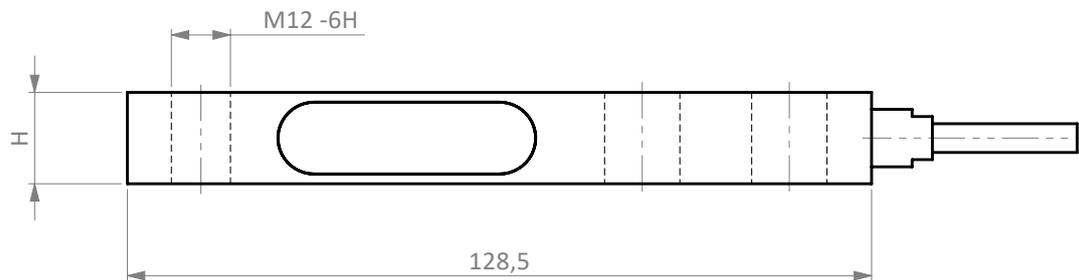


Top View

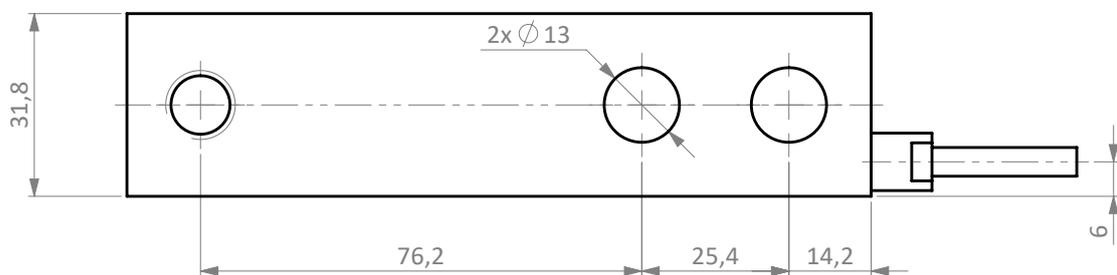

Side View



Isometric View

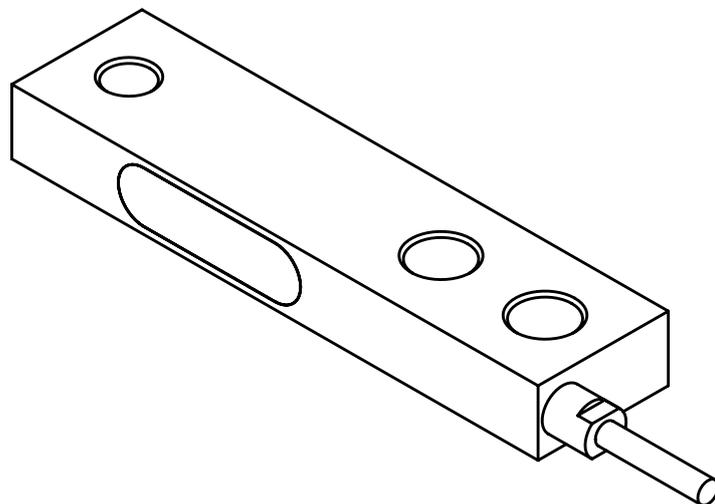

Capacity \ Dimension	H
200kg	12.7
500kg	15.9
1000kg	19.1
2000kg	25.4

Specifications and dimensions are subject to change without notice and do not constitute any liability whatsoever.