



## Short Description



- Nickel plated alloy steel IP68 shear beam load cell
- Hermetically sealed
- Suitable for truck, track, hopper and other electronic weighing devices
- Includes HY-8-101 Load button



Test certificate no. TC8103 Revision 0  
C of C no R60/2000-NL1-12.14

## Available Models

Capacity	Accuracy	Full Article Description
1t	C3 Excluded from OIML	HM8-C3-1t-6.5B6 + HY-8-101-0.5/3t
2t	C3 Excluded from OIML	HM8-C3-2t-6.5B6 + HY-8-101-0.5/3t
3t	C3 Excluded from OIML	HM8-C3-3t-6.5B6 + HY-8-101-0.5/3t
5t	C3	HM8-C3-5t-6.5B6 + HY-8-101-5t
10t	C3	HM8-C3-10t-6.5B6 + HY-8-101-10/15t
15t	C3	HM8-C3-15t-6.5B6 + HY-8-101-10/15t
20t	C3	HM8-C3-20t-6.5B6 + HY-8-101-20/25t
25t	C3	HM8-C3-25t-6.5B6 + HY-8-101-20/25t
30t	C3 Excluded from OIML	HM8-C3-30t-6.5B6 + HY-8-101-30t

## Technical Specifications HM8


Accuracy Class		C3		OIML R60 C3		
Output Sensitivity ( = FS )	mV/V	2.0 ± 0.002				
Maximum Capacity ( E <sub>max</sub> )	t	1, 2, 3, 30		5, 10, 15, 20, 25		
Max. Number of Load Cell Intervals	n <sub>LC</sub>	3000				
Ratio of min. LC Verification Interval	Y = E <sub>max</sub> / v <sub>min</sub>	10000		15000		
Combined Error	%FS	≤± 0.020				
Creep Error (30 minutes)	%FS	≤± 0.016				
Temperature Effect on Zero (ZTC)	%FS/10°C	≤± 0.015				
Temperature Effect on Sensitivity (STC)	%FS/10°C	≤± 0.011				
Zero Balance	%FS	≤± 1.0				
Safe Overload	%FS	150				
Ultimate Overload	%FS	300				
Excitation, Recommended Voltage	V	5 ~ 12				
Excitation, Maximum Voltage	V	18				
Input Resistance	Ω	400 ± 10				
Output Resistance	Ω	351 ± 3.0				
Insulation Resistance (50V)	MΩ	≥5000 ( at 50VDC )				
Compensated Temperature	°C	-10 ~ +40				
Operating Temperature	°C	-35 ~ +65				
Storage Temperature	°C	-40 ~ +70				
Load Cell Weight	kg	1t – 3t: ~2.4	5t: 4.3	10-15t: 9.1	20t-25t: ~12.3	30t: 26.1
Element Material		Nickel Plated Alloy Steel				
Ingress Protection (acc. to EN 60529)		IP68				
Recommended Torque on Fixation Bolts	Nm	M12: 75	M14:120	M20:450	M27:1075	M33:1975
ATEX Classification (optional)		II 1G Ex ia IIC T4 Ga		II 1D Ex ia IIIC T <sub>200</sub> 135°C Da		II 3G Ex ic IIC T4 Gc

## Wiring

### Features:

Cable type: Shielded, 6 conductor cable , conductor AWG 24  
 Cable diameter: Ø 6.2mm  
 Cable length: 6.5m  
 Cable jacket: PVC  
 Shield not connected to element


### 6-Wire Connection Diagram

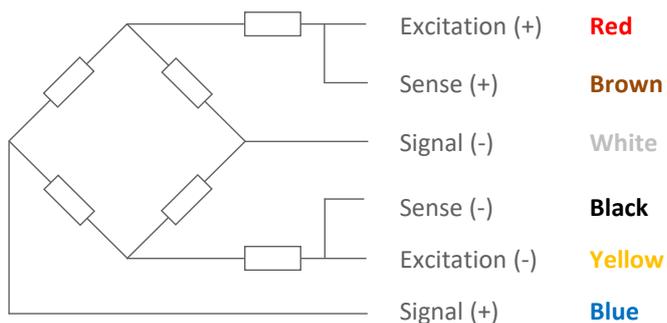


Specifications and dimensions are subject to change without notice and do not constitute any liability whatsoever.

## Dimensions in mm


### Front View

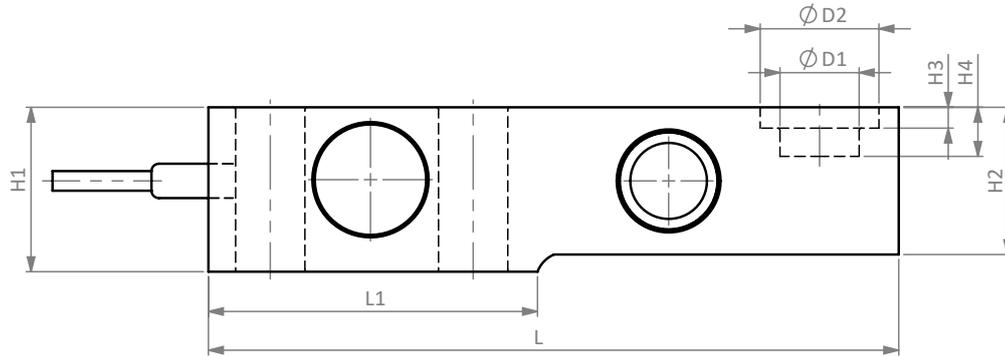

### 1t – 25t Top View



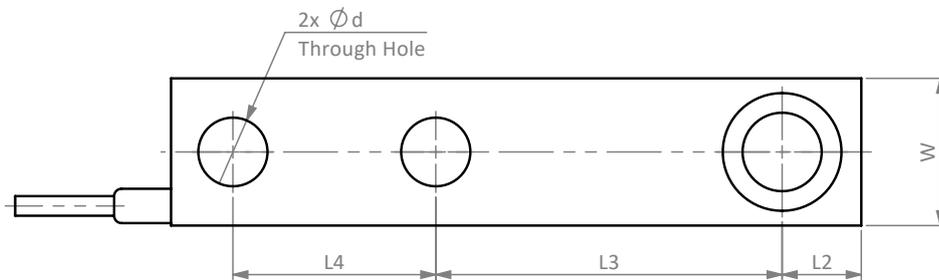


### 30t Top View

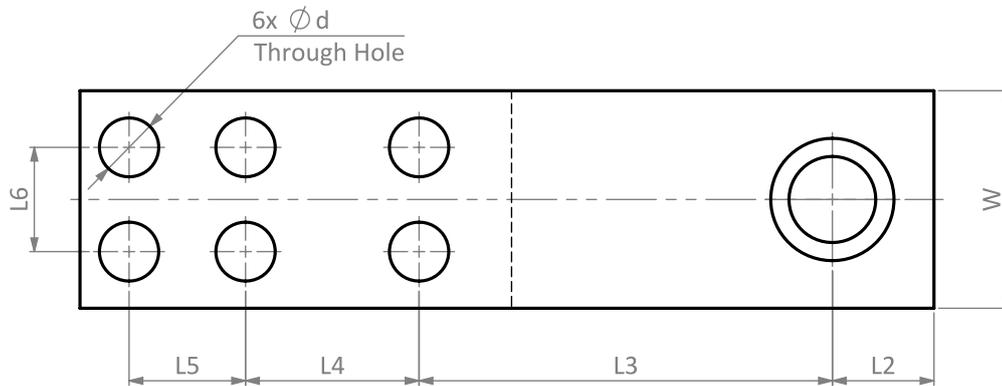

Dimension Capacity	H1	H2	H3	H4	ØD1	ØD2	Ød	W	L	L1	L2	L3	L4	L5	L6
1t-2t	43	37	12.5	30	16	32	13	37	203	95	22	98	64	-	-
3t	43	37	12.5	25	16	32	15	37	203	95	22	98	64	-	-
5t	52	48	12.5	30	22	38	21	48	235	110	22	124	66	-	-
10t, 15t	67	60	8.5	20	32	48	28	60	279	133	32	140	82	-	-
20t, 25t	82.5	70	10	24	38	54	34	70	318	153	38	159	89	-	-
30t	115	90	14	32	38	54	26	96	374	189	44.5	181	76	51	46

## Available Accessories
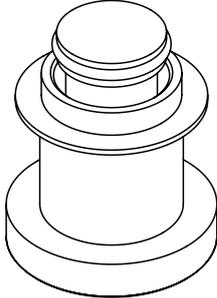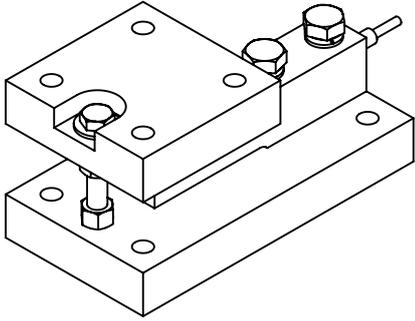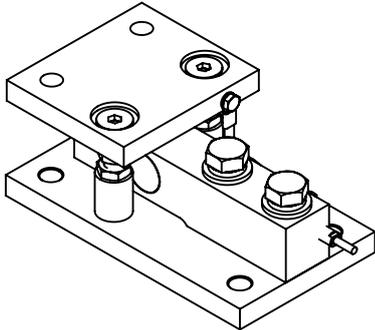
<p><b>HY-8-101-0.5-30t Load Button</b></p> <ul style="list-style-type: none"><li>• Easy installation</li><li>• Anti-corrosion</li><li>• Good self-alignment ability</li><li>• Mainly used for truck scales, platform scales and other electronic weighing devices</li></ul>	
<p><b>HM-8-401-0.5-20t Mount</b></p> <ul style="list-style-type: none"><li>• Easy installation</li><li>• Nickel plated alloy steel</li><li>• Lift-off protection</li><li>• Anti-overload Protection</li><li>• Good self-alignment ability</li><li>• Using under heavy static or slight dynamic load</li></ul>	
<p><b>HM-8-407-0.5-15t Mount</b></p> <ul style="list-style-type: none"><li>• Nickel plated alloy Steel</li><li>• Good self-alignment ability</li><li>• Lift-off protection</li></ul>	
<p><b>BY-8-110 10t Foot</b></p> <ul style="list-style-type: none"><li>• Solid Stainless Steel Foot</li><li>• Easy installation</li><li>• Can be used with H8 10t &amp; HM8 10t Load cells</li></ul>	