




Short description

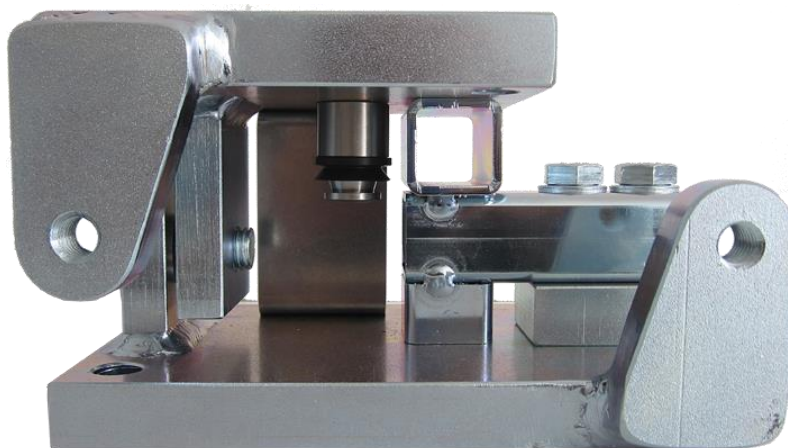

- Complete mounting set for quick and easy mounting.
- This includes:
a loadcell dummy, transport plate, lift off protection and earthing cable.
- Stainless steel
- Mount delivered without working loadcell and without stay rod.
Those parts need to be ordered separately.
- Can be used with Load Cell models: BM8D

Available models

Model	Capacity	Full article description	Part number
BM-8-906	0.15t – 2t	BM-8-906-0.15/2t	2082064
	2.5t – 5t	BM-8-906-2.5/5t	2082065
	0.1t – 2t	Rod End 0.1/2t Stainless Steel	2082068
	2.5t – 5t	Rod End 2.5/5t Stainless Steel	2082069

Technical specifications BM-8-906

Capacity with load cell	0.15t – 2t	2.5t – 5t
Maximum vertical force (down) with dummy load cell	15 kN	30 kN
Maximum vertical force (up)	15 kN	30 kN
Maximum horizontal force (with stay rod installed)	20 kN	40 kN
Maximum horizontal movement (without stay rod)	+1.5 / -1.5 mm	

Notes:

- When horizontal forces are expected in use, we highly recommend installing the stay rod.
- Front View drawings show U-shaped transport plate installed. Please refer to installation manual.


Specifications and dimensions are subject to change without notice and do not constitute any liability whatsoever.

Mounting Set type BM-8-906


Dimensions in mm

0.15t – 2t


Side View

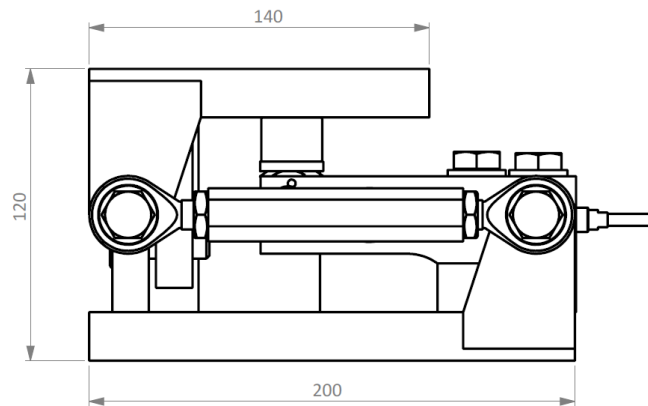

Top View

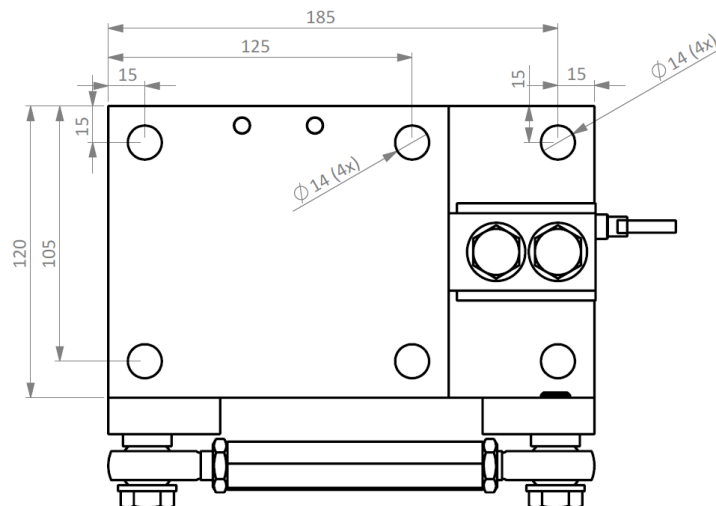

Front View

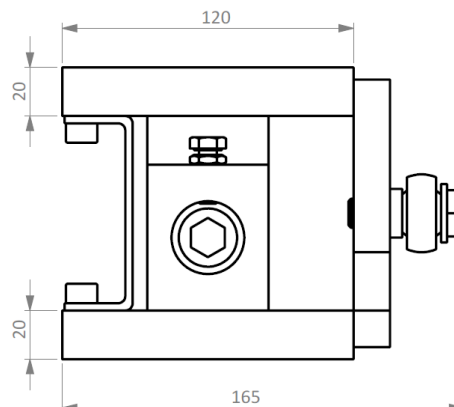

Specifications and dimensions are subject to change without notice and do not constitute any liability whatsoever.

Zemic Europe B.V.
Leerlooierstraat 8
4871 EN Etten-Leur
The Netherlands

Nr. 2020.08 BM-8-906 Rev3


2/3

T: +31 76 50 39480
F: +31 76 50 39481
info@zemic.nl
www.zemiceurope.com


Mounting Set type BM-8-906

2.5t – 5t


Side View

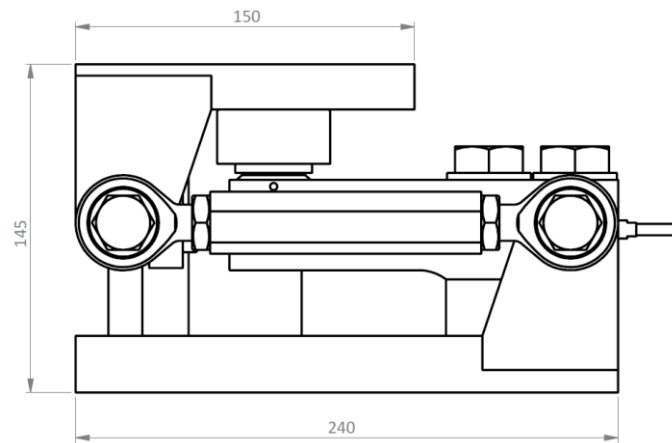

Top View

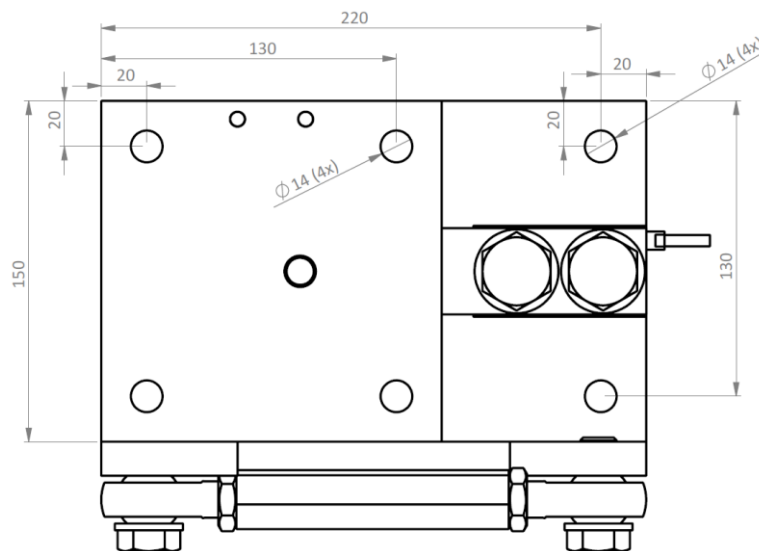

Front View

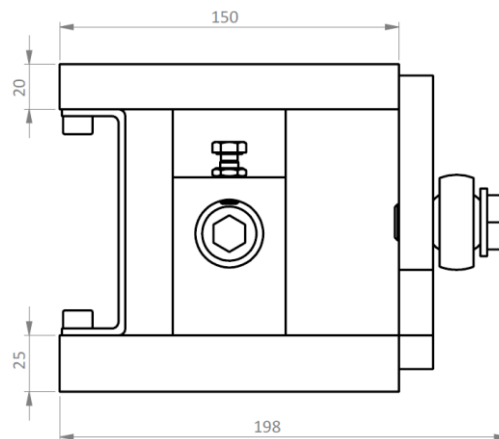

Specifications and dimensions are subject to change without notice and do not constitute any liability whatsoever.