

## KSBX

"KSBX" series STAINLESS steel kit, for SBT/SBK/SBX shear beam load cells



Mounting kit for SBT/SBK/SBX shear beam load cell up to 2.500 kg. Suitable for weighing of hoppers, tanks, platforms etc.

ADVANTAGES:

- AISI 304 STAINLESS steel construction
- Higher plate with configurable system "lock, "side" or "free"
- Mechanical joint for optimal weighing precision
- Height regulation for a correct levelling of the structure
- Anti-overturn
- Locking/bypass system for facilitated transport and maintenance
- ATEX version available, for zones 1&21, 2&22.

The best solution  
for advanced industrial  
applications

## KIT FOR LOAD CELLS: FUNCTIONS

- Rapid installation / removal of the cell, even with full-loaded structure.
- Higher plate with system of expansion compensation, having three specific functions (lock, side and free).
- Bypass function for transport/moving of the structure and maintenance.
- Anti-overturn (within the limits indicated in the product manual).
- Limit function against accidental overload (within the limits indicated in the product manual).
- Fake cell function for weighing of liquid materials.

## KIT FOR LOAD CELLS: FEATURES

- Manufactured with technologies studied and designed by Dini Argeo.
- Suitable for SBT/SBK/SBX load cells, up to 2500kg (not included in the kit).
- Fully in STAINLESS steel AISI 304, with electropolished finishing, for better resistance to external agents.
- Oscillating joint, for optimal weighing precision.
- Simplified base fixing with 3 holes, or complete with 4 holes.
- The kit is designed to allow the correct functioning of the cells and obtain optimal weighing precision. However, it does not have protection function for the cell, neither for the structure. Consult the manual for more technical details.


## ONE KIT, THREE DIFFERENT CONFIGURATIONS

- Thanks to its special higher plate, the KSBX kit can be easily configured in the installation phase, in order to contrast or facilitate the expansions of the structure to be weighed, and without being forced to choose particular accessories or versions when ordering the material.

The three specific configurations are:

- "lock" mode, completely locked movement, which contrast expansions and side forces from any direction
- "side" mode, free movement in just one direction, useful to avoid rotations and twisting
- "free" mode, free movement in any direction

**DETAIL 1**

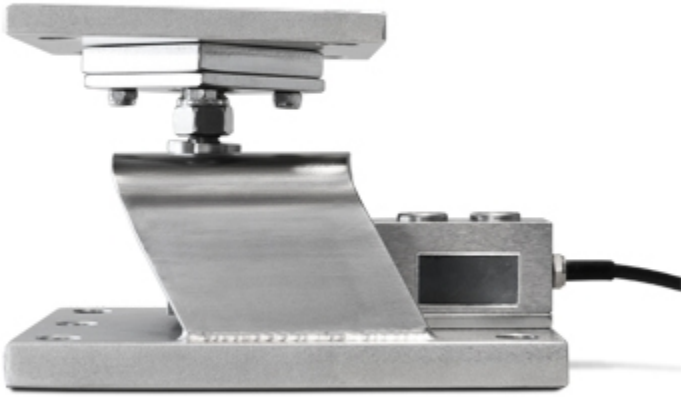

**DETAIL 2**



**DETAIL 3**





“YOUR WORLDWIDE PARTNER FOR WEIGHING,”

DINI ARGEO  
FRANCE sarl  
France

DINI ARGEO  
GMBH  
Germany

DINI ARGEO  
UK Ltd  
United Kingdom

DINI ARGEO WEIGHING  
INSTRUMENTS Ltd  
China

DINI ARGEO  
OCEANIA  
Australia



**COMPANY HEADQUARTERS**

Via Della Fisica, 20  
41042 Spezzano di Fiorano Modena • Italy  
Tel. +39.0536 843418

**SERVICE ASSISTANCE**

Via Dell'Elettronica, 15  
41042 Spezzano di Fiorano Modena • Italy  
Tel. +39.0536 921784

SALES AND TECHNICAL ASSISTANCE SERVICE