


Type JXH-4BS



Short description

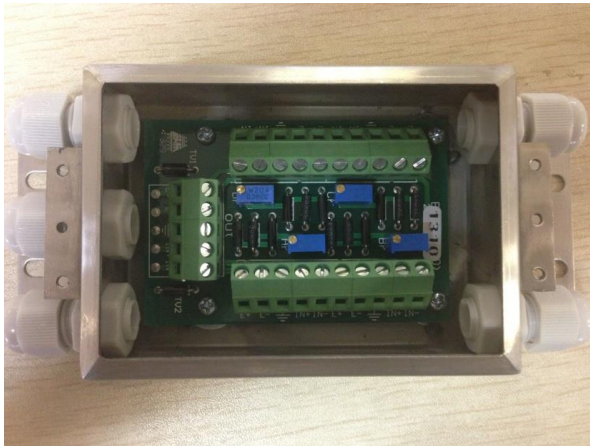

- Fit for 4-wire load cells
- Easy installation
- Stainless steel housing

Available models

| Model | Amount of connections | Full article description | Part number |
|---------|-----------------------|----------------------------|-------------|
| JXH-4Bs | 4 | JB-SS304 small 4 lcs (JXH- | 3008011 |


Technical specifications JXH-4Bs

| | | |
|-----------------------------------|--------------------|-----------------|
| Load cell output resistance range | Ω | 340 to 1100 |
| Load cell input resistance range | Ω | 340 to 1100 |
| Excitation, recommended voltage | V(AC&DC) | 5 to 15 |
| Excitation, maximum | V(AC&DC) | 20 |
| Load cell sensitivity range | mV/V | 0.6 – 3 |
| Cable \varnothing | mm | 5 to 6.2 |
| Correction method | | Excitation trim |
| Trimming range | Ω | 20 (± 10) |
| Temperature range, operating | $^{\circ}\text{C}$ | -40 ~ +85 |
| Ingress protection | | IP65 |
| Housing connected to shield | | No |
| External grounding | | No |

Specifications and dimensions are subject to change without notice and do not constitute any liability whatsoever.

Type JXH-4BS

Dimensions in mm

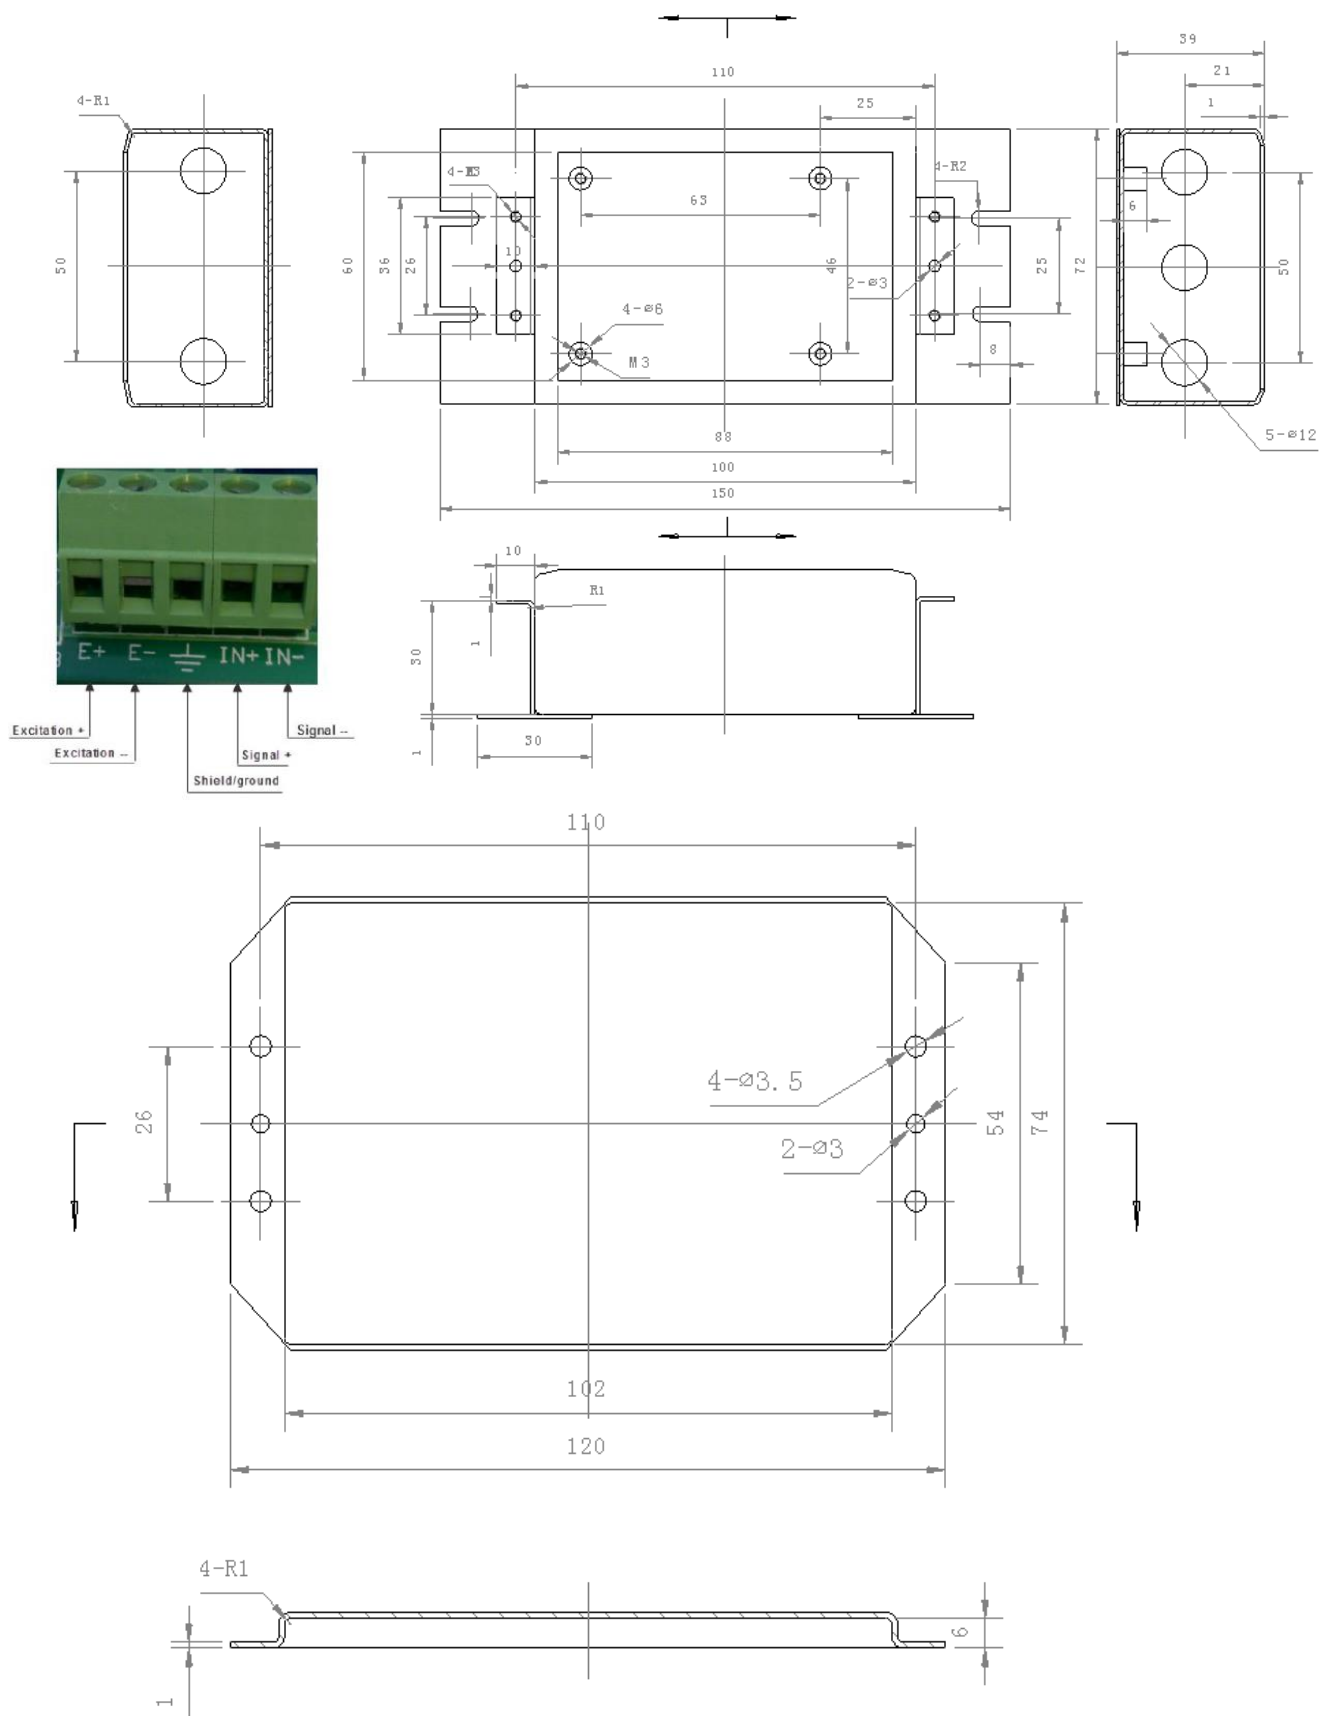

Specifications and dimensions are subject to change without notice and do not constitute any liability whatsoever.