

Short Description

- Complete Mounting set for quick mounting without any problems.
- This includes:
a loadcell dummy, two rocker supports, a transport plate, lift off protection and a grounding cable
- Stainless steel type 1.4301 (304)
- Mount delivered without working loadcell and without rod end/stay rod
Those parts need to be ordered separately
- Can be used with load cell models: BM14C

Available Models

Model	Capacity	Full Article Description	Part Number
BM-14-910	0.5t – 30t	BM-14-910-0.5t-30t	21402300
	40t – 50t	BM-14-910-40t/50t	21402301
		Rod End 0.5t-50t Stainless Steel	21402302

Detailed Specifications BM-14-910

Capacity with load cell	0.5t – 30t	50t
Maximum vertical force (down) with dummy load cell	70 kN	
Maximum vertical force (up)	25 kN	
Maximum horizontal force (with stay rod installed)	35 kN	
Maximum horizontal force (without stay rod installed)	5 kN	
Maximum horizontal movement (without stay rod)	+2 / -2 mm	


Notes:

- When horizontal forces are expected in use, we highly recommend installing the stay rod.
- Dimensional drawings show stay rod and transport plate installed.


Specifications and dimensions are subject to change without notice and do not constitute any liability whatsoever.

Dimensions in mm

Side View:

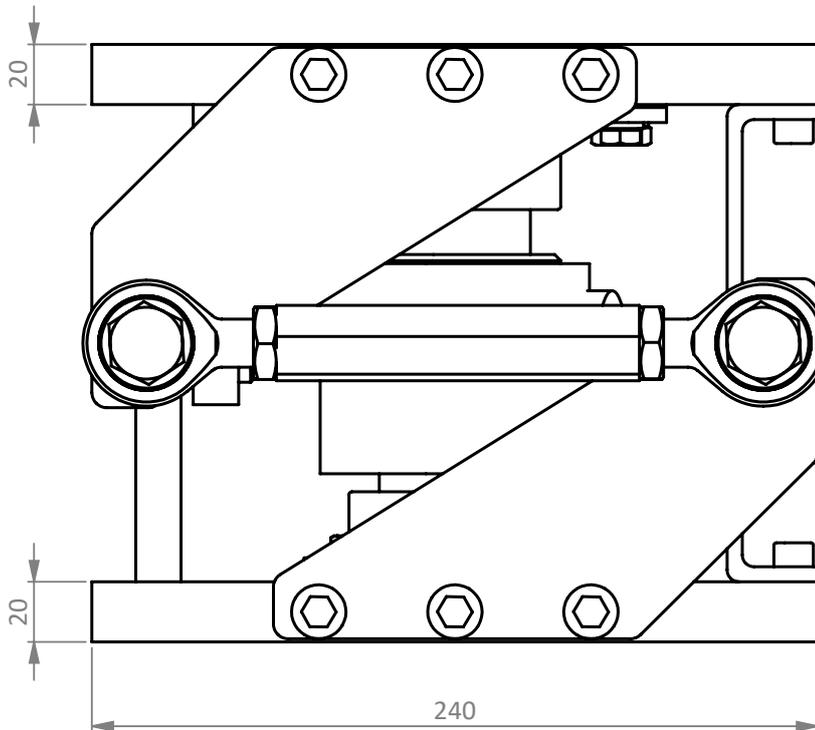


Top View:

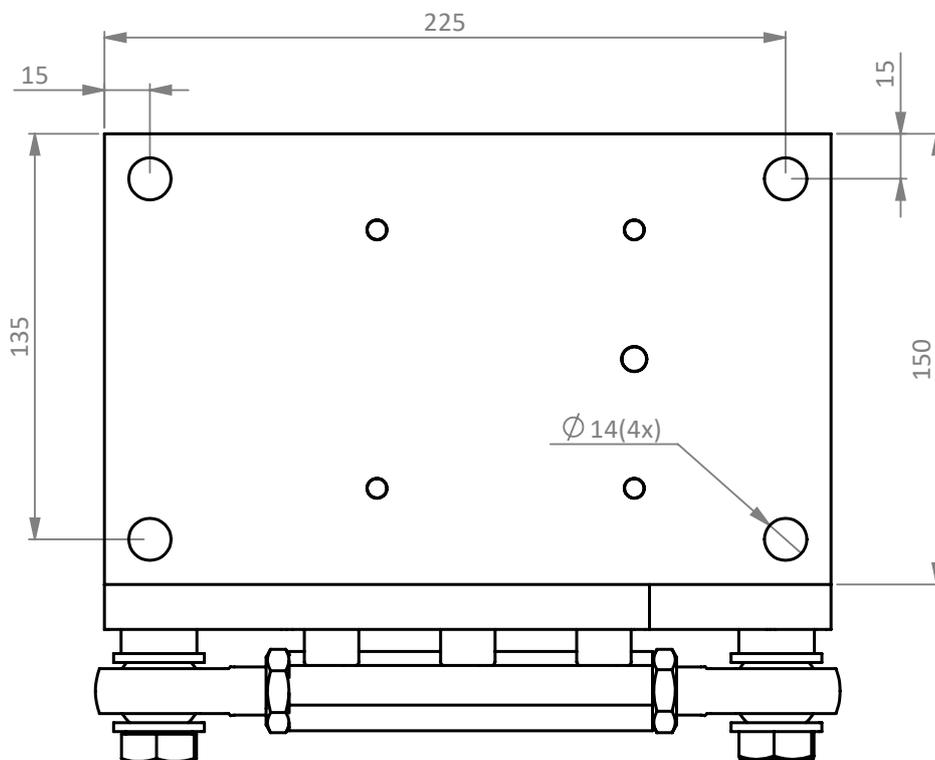


Mounting Set Type BM-14-910



Front View:

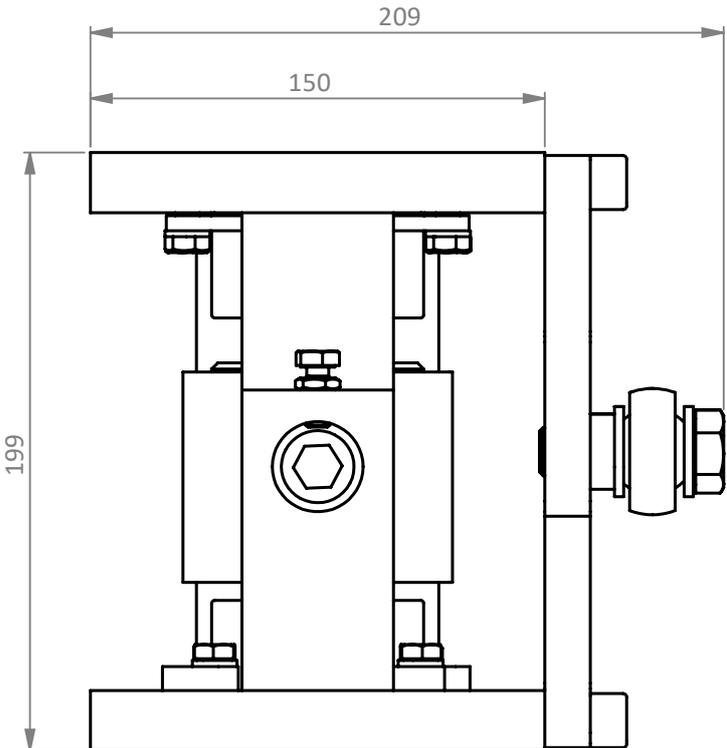

Isometric View:

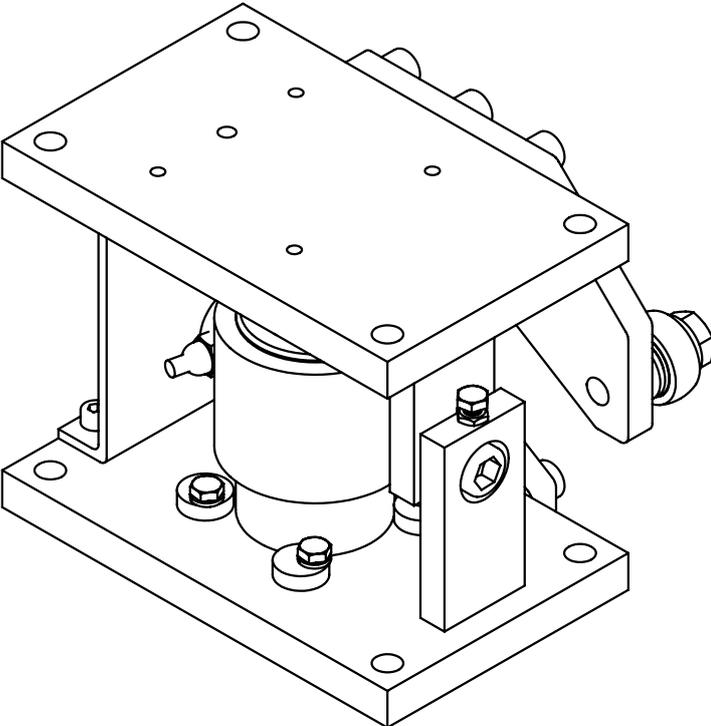

Specifications and dimensions are subject to change without notice and do not constitute any liability whatsoever.

