
Type HM-8-900 Mount

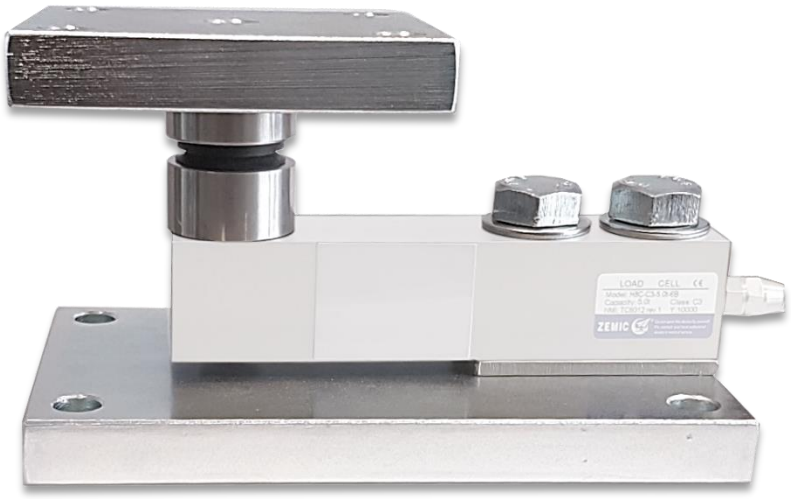

Short Description

- Nickel plated alloy steel load cell mount
- Adjustable mounting height
- Easy installation
- Using under heavy static load or slight dynamic load
- Can be used with load cell models: H8C
- Mount delivered without a load cell. Load cell needs to be ordered separately

Available Models

Model	Capacity	Full Article Description	Part Number
HM-8-900	0.1 – 2t	HM-8-900-0.1t/2t	20820500
	2.5 – 5t	HM-8-900-2.5t/5t	20820501

Technical Specifications HM-8-900

Capacity with load cell	0.1t – 2t	2.5t – 5t
Maximum vertical force (down) with loadcell	30 kN	75 kN
Maximum vertical force (up)	N.A.	N.A.
Maximum horizontal force	3 kN	5 kN
Maximum horizontal movement	± 0.35 mm	± 0.35 mm


Specifications and dimensions are subject to change without notice and do not constitute any liability whatsoever.

We believe we make you stronger!


Zemic Europe B.V.
T: +31 76 50 39480
info@zemic.nl
www.zemiceurope.com

Dimensions in mm


Side View

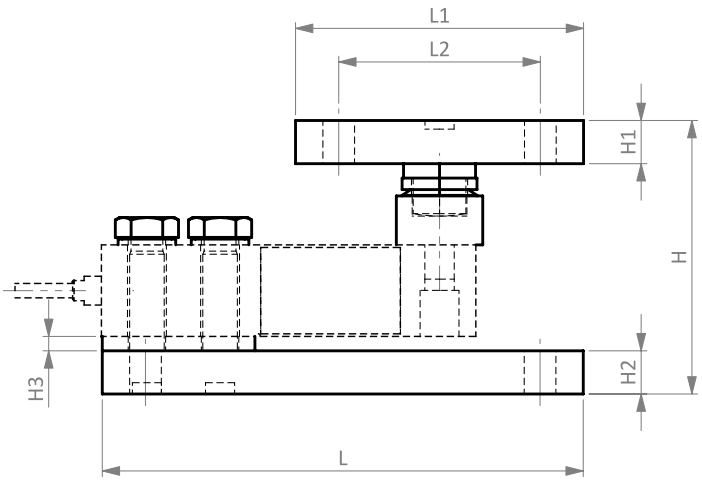


Front View



Top View

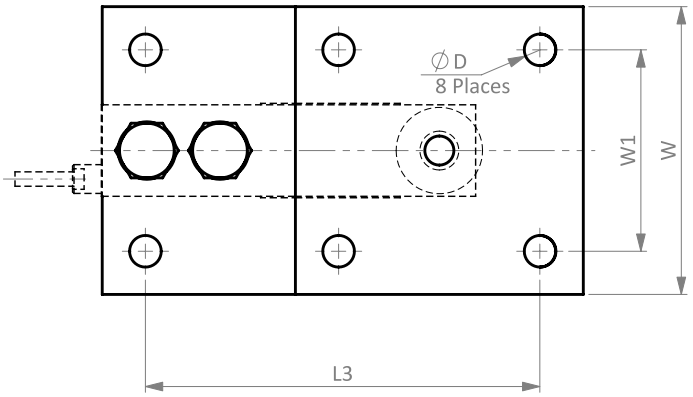

Isometric View

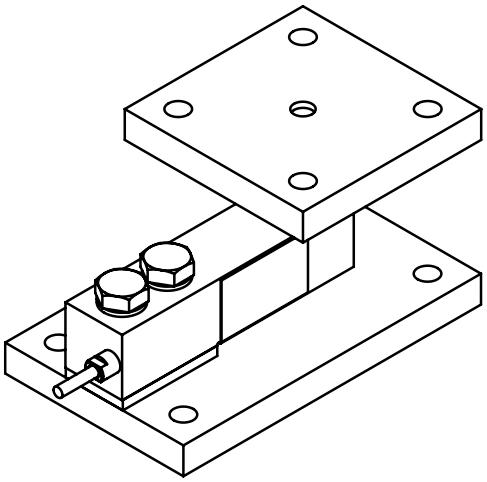

Dimension / Capacity	L	L1	L2	L3	H	H1	H2	H3	W	W1	ØD
0.1t – 2t	167	100	70	137	95	15	15	5	100	70	11
2.5t – 5t	213	120	90	183	125	20	20	5	120	90	14

Specifications and dimensions are subject to change without notice and do not constitute any liability whatsoever.

Zemic Europe B.V.
T: +31 76 50 39480
info@zemic.nl
www.zemiceurope.com